




## Lowering the Side Rail

### Dismounting

1. Raise the bed to its highest position.
2. Lower the side rail to its lowest position.
3. Push and hold the two latches towards each other and lower the side rail until the plunger stopper touches the mattress platform.

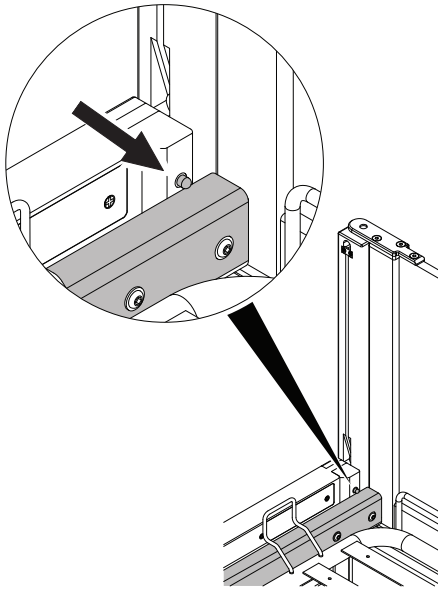

4. Hold the side rail with one hand and press the plunger stopper on one of the sides with the other hand A to remove the side rail (as shown in B).

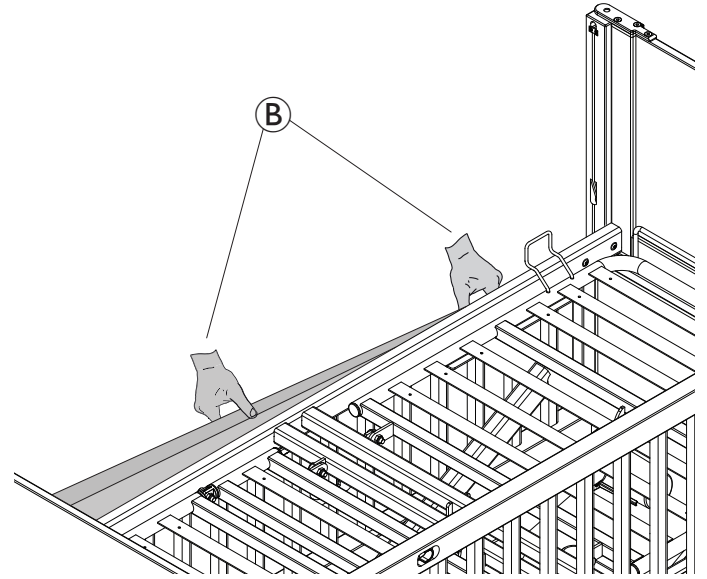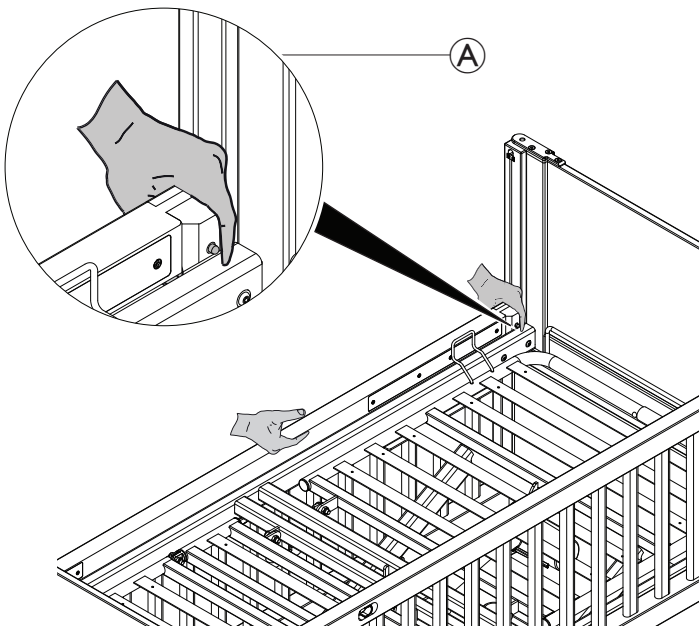

5. Follow steps 1 and 2 in the mounting section, in reversed order, to remove the pillars at both ends of the bed.

